
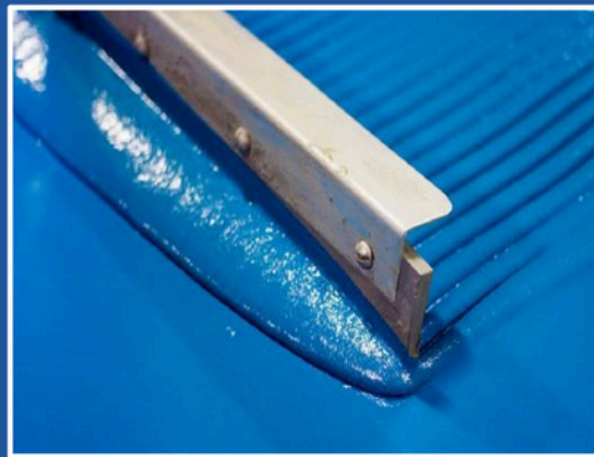


# ResinTek Urethane Cement 1/8" Self-Leveling RT-UC 1/8"

## Product Description

RT-UC 1/8" Self-Leveling is a three-part urethane polymer concrete super flowable product. It is a medium duty self-leveling material applied at 1/8" thickness using 1/2" v-notched rubber squeegee. The system can withstand aggressive chemical attack, thermal shock resistance, and high impact resistance. It is designed to be used as an underlayment providing superior functional subfloor for other polymeric toppings or for resilient flooring.

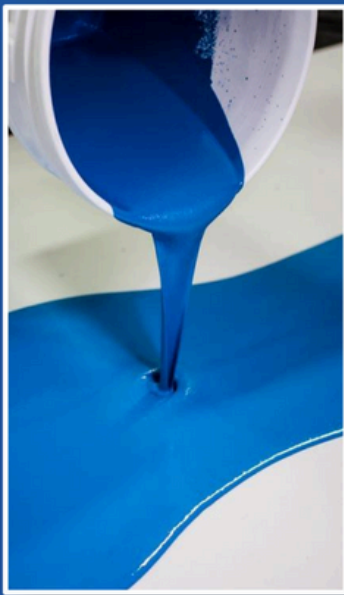

## Advantages

- Water-Based Low Emission
- Contains 20% Plant Based Ingredients
- Meets USDA, FDA, and CFIA Standards
- Self-Priming for Superior Adhesion
- Superior Impact Resistance
- Meets California VOC and SCAQMD requirements
- Wide Temperature Service Range from -50°F to 200°F
- Minimum Application Temperature, 35°F and Above
- High Tolerance to Moisture Vapor Pressure, up to 15lbs.
- Green Concrete Applicable, 7 Day Old Concrete
- Resistance to Growth of Bacteria and Fungi

## Recommended Uses

- Chemical Processing
- Food Processing Areas
- Restaurants
- Pharmaceutical
- Bakeries
- Cage Wash Areas
- Bottling Areas
- Sanitize/Wash Areas
- Plant Vehicle Aisles
- Warehouses
- Mechanical Rooms

# ResinTek Urethane Cement 1/8" Self-Leveling RT-UC

## Concrete Moisture Condition

RT-UC 1/8" Self-Leveling can withstand moisture vapor pressure up to 15 lbs./1,000 sq. ft./24 hours. It is the responsibility of the owner or the owner's representative to examine the substrate for contaminants, moisture, and condition of the concrete slab.

Please contact ResinTek Technical Services Team for additional guidelines

Mechanical Properties	Test Method	Result
Hardness	ASTM-D-2240	80D
Compressive Strength	ASTM C-579	8800 psi
Shrinkage	ASTM C-531	0.30%
Tensile Strength	ASTM C-307	1450 psi
Flexural Strength	ASTM C-580	5000 psi
Adhesion to Concrete	ASTM D-7234	>400 psi, Concrete Failure
Impact Resistance	ASTM D-2794	>160 in./lb.
Water Absorption	ASTM C-413	< 0.01%
Flame Spread/NFPA 101	ASTM E-648	Class 1
Abrasion Resistance, CS 17 wheel, 1000-gram load, 1000 cycles	ASTM D-4060	70 mg loss
Coefficient of Friction (James Friction Tester)	ASTM D-2047	0.60, Meet ADA

Physical Properties	Data
Percentage Solids by weight	100%
Mix Ratio (by volume)	3 component Kit
Viscosity at 70°F	Not applicable
Pot Life at 70°F	15-20 minutes
Dry Time at 70°F	6-8 hours
Working Time at 70°F	15 minutes
Speed Rate	38 Sq. Ft./unit @ 1/8" thickness
System Spread Rate with Broadcast	60 Sq. Ft./unit using 1/2" V-Notch
Volatile Organic Compounds (VOC)	<5 g/l

## Surface Inspection

All surface overlays should be carefully inspected for surface stains, contaminants, and unsound areas, such as soft or dusting surfaces and delamination's. Surface overlay should be carefully checked to locate weak material or delaminated areas. All cracks should be identified and labeled as structural, moving, or non-moving to determine a proper repair method. Control, isolation, and expansion joints should be identified for repairs and sealing. Prior to commencing work, the Architect, Engineer, Owner, and/or the owner's agent must be notified of any project condition changes, detrimental or unsatisfactory conditions that could either delay the completion of the project, interfere with execution of the contract, or result in a defective or faulty installation. Work should not proceed until all conditions have been met to the satisfaction of all parties with respect to all agreed upon changes.

# ResinTek Urethane Cement 1/8" Self-Leveling RT-UC

## Surface Preparation

Remove all unsound concrete, tiles, weak grout, laitance, existing coatings, overlays, mastics, adhesives, curing compounds, unsound joint materials, and all other materials that may impede proper adhesion of the polymer system. Be sure to use mechanical and abrasive methods that do not create micro-cracking of the substrate. Acid or caustic etching may be required on some projects. When abrasive blasting is not required, acid etching and chemical detergent cleaning is often an acceptable method. Concrete substrate must be neutralized after chemical cleaning: Contact ResinTek for more information. Surfaces exposed to oils, grease or fatty acids need to be carefully washed with a detergent and emulsifier before abrasive blasting. The required Concrete Surface Profile (CSP) achieved with mechanical preparation should be performed in accordance with ICRI Guidelines. CSP 3 & concrete surface profile are needed for RT-UC 1/8" Self-Leveling application.

## Contaminated Concrete

Detergent scrub and rinse with clean water to remove surface dirt, oil, grease, and any other contaminants.

## Materials

RT-UC 1/8" Self-Leveling is available as a kit.

Each kit is comprised of: Part A (resin), Part B (hardener), and Part C (aggregate).

RT-UC Self-Leveling is notch squeegee applied at 1/8" followed by a loop roller.

**Tools:** ½" V-notch Rubber Squeegee and Loop Roller

**Spread Rate:** 38 sq. ft. per unit using 1/8" Cam/Guage Rake

# ResinTek Urethane Cement 1/8" Self-Leveling RT-UC

**System Spread Rate with Broadcast:** 60 sq. ft. per unit using 1/2" V-notch.

**DO NOT MIX UNTIL READY FOR IMMEDIATE USE**

## General Mixing

Proper planning of mixing and application workflow are essential elements to achieving a seamless and aesthetically pleasing floor.

Plan by laying out installation into sections. Allow the full width of the area to be completed in 15 minutes or less to ensure no placement lines are visible, as cold joint lines will show in the finished floor. Edge details, sloping, and proper pitching are critical for proper flooring system installation. Crack repairs must also be addressed before installation of the ResinTek system.

## Basic Mixing

1. Pour Part A (resin) into a 5-gallon pail. Make sure the entire content of Part A (resin) is completely drained.
2. Add Part B (hardener) to Part A (resin).
3. Mix Part A (resin) and Part B (hardener) together use a high-speed drill (800 RPM) with a 5" Jiffiler type blade for at least 30 seconds.
4. Gradually add Part C (aggregate) and mix continuously for at least 2 minutes until a homogeneous mix is attained. Move the blade around continuously to ensure the mixture is completely mixed and uniform.

## THOROUGH AND COMPLETE MIXTURE IS CRITICAL

The application tool must be kept as clean as possible to avoid excessive buildup of old material. Utilize new squeegees or rakes as necessary to avoid disrupting the application workflow. Use new squeegees when the tips are worn. Avoid dripping solvent into the material during application. Check the floor for proper thickness frequently to ensure your tools are still delivering proper coating thickness.

Allow the installed coatings to fully cure. A minimum of eight (8) hours is needed for light foot traffic when applied at 75°F or above. A minimum cure time of 24 hours may be required for temperatures below 75°F. Material should not be applied at temperatures below 50°F. Additional cure time is needed for heavy traffic loads, such as for forklifts and heavy machinery.

## Color Selections

Blue, Grey, Dark Grey, Charcoal, Green, Tile Red, and Chestnut.

# ResinTek Urethane Cement 1/8" Self-Leveling RT-UC

## Storage

- Must be stored in a dry environment between 50°F - 90°F. Do not allow Part A (resin) or Part B (hardener) to freeze.
- Part A (resin) and Part B (hardener) have approximately 1-year shelf life from the date of manufacture.
- Part C (aggregate) has approximately six (6) months shelf life from the date of manufacture.
- Must be in original, factory sealed container.
- Store drums on wooden pallets to avoid direct contact with the ground.
- Do not open until it is ready to be used.

## Limitations

- Do not use broken, damaged, or wet bags of Part C (aggregate).
- Do not split, subtract, or add to the kits unless there are inert materials such as pea gravel or sand for extending purposes.
- Bleaching and staining are possible in pigmented systems due to certain chemicals. (This will not affect performance).
- This product is not UV stable. Sunlight and metal halide exposure will cause yellowing. (This will not affect the performance).
- Batch-to-batch color variations may occur. For best results, use the same lot number together for color consistency.
- Do not apply to un-reinforced sand cement screeds, asphalt or bitumen substrates, glazed tile or nonporous brick and tile, magnesite, copper, aluminum, polyesters or elastomeric membranes.
- Old, damaged, bags of Part C (aggregate) may affect flow, leveling and healing properties.
- **Caution! Do not remove any materials from any pre-measured kits.**

## Cleanup

Clean up mixing station, tools, and application equipment immediately after completion. Use suitable solvent as specified by ResinTek' Technical Services Team or if permissible by law, xylene, as a general over-the-counter solvent. Observe all fire hazards, legal, and health and safety precautions when handling or storing solvents, particularly in confined spaces. Make sure the working area is always well-ventilated.

## Maintenance

Occasionally inspect the installed floor by spot cleaning and spot repairing any damaged or cracked areas. To prolong the life of the flooring system, a daily cleaning maintenance program is highly recommended to ensure the floor is safe for its intended purpose.

## Safety Precautions

The installation crew must always have proper personal protective equipment (PPE) before, during, and after handling all products. All product safety data sheets (SDS) must be read completely and thoroughly prior to starting work.

Follow and observe all manufacturer, local, state, and federal regulations and safety hazards warnings, procedures, and guidelines. Use only as directed.

For professional use only. KEEP OUT OF THE REACH OF CHILDREN.

## Disposal

Dispose of all excess materials, packaging, and other waste in accordance with federal, state, and local regulations.

# ResinTek Urethane Cement 1/8" Self-Leveling RT-UC

	ResinTek Skim Coat	RT-UC 1/8" Self-Leveling	RT-UC 1/4" Self-Leveling	ResinTek Trowel Grade	ResinTek Cove Base
<b>Part A (Resin)</b>	5 lbs.	<b>8 lbs.</b>	8 lbs.	5 lbs.	2.5 lbs.
<b>Part B (Hardener)</b>	5 lbs.	<b>8 lbs.</b>	8 lbs.	5 lbs.	2.5 lbs.
<b>Part C (Aggregate)</b>	5 lbs.	<b>25 lbs.</b>	39 lbs.	40 lbs.	30 lbs.

## LIMITED WARRANTY

ResinTek warrants its products to be free of manufacturing defects and meets all ResinTek current published physical properties. ResinTek's sole responsibility shall be to replace the portion of any product proved to be defective. There are no other warranties by ResinTek of any nature whatsoever expressed or implied, including any warranty of merchantability or fitness for a particular purpose in connection with this product. ResinTek shall not be liable for damages of any sort, including remote or consequential damages resulting from any claimed breach of any warranty whether expressed or implied. ResinTek shall not be responsible for the use of this product in a manner to infringe on any patent held by others. In addition, no warranty or guarantee pertaining to appearance, color, fading, chalking, staining, shrinkage, peeling, normal wear and tear or improper application by the applicator will be issued. Damage caused by abuse, neglect, and lack of proper maintenance, acts of nature and/or physical movement of the substrate or structural defects are also excluded from the limited warranty. ResinTek reserves the right to conduct performance tests on any material claimed to be defective prior to any repairs by owner, general contractor, or applicator.

## DISCLAIMER

All guidelines, recommendations, statements, and technical data contained herein are based on information and tests. The accuracy and completeness of such tests are not guaranteed and are not to be construed as a warranty, expressed, or implied. It is the responsibility of the user to document information and test to determine the intent of the product for one's own use. The application, job conditions and user assume all risks and liability resulting from use of the product. We do not suggest or guarantee any hazards listed herein are the only ones which may exist. Neither seller nor manufacturer shall be liable to the buyer or any third person for any injury, loss or damage directly or indirectly resulting from use of, or inability to use the product. Recommendations or statements, whether written or verbal, other than those contained herein shall not be binding upon the manufacturer, unless in writing and signed by a corporate officer of the manufacturer. Technical and application information is provided for the purpose of establishing a general profile of the material and proper application procedures. Test performance results were obtained in a controlled environment and ResinTek makes no claim that these tests or any other tests accurately represent all environments. Not responsible for any typographical errors.